AMERICAN LAWN MOWERS

C.B. Swett
176 Main St
Mt. Morris, NY

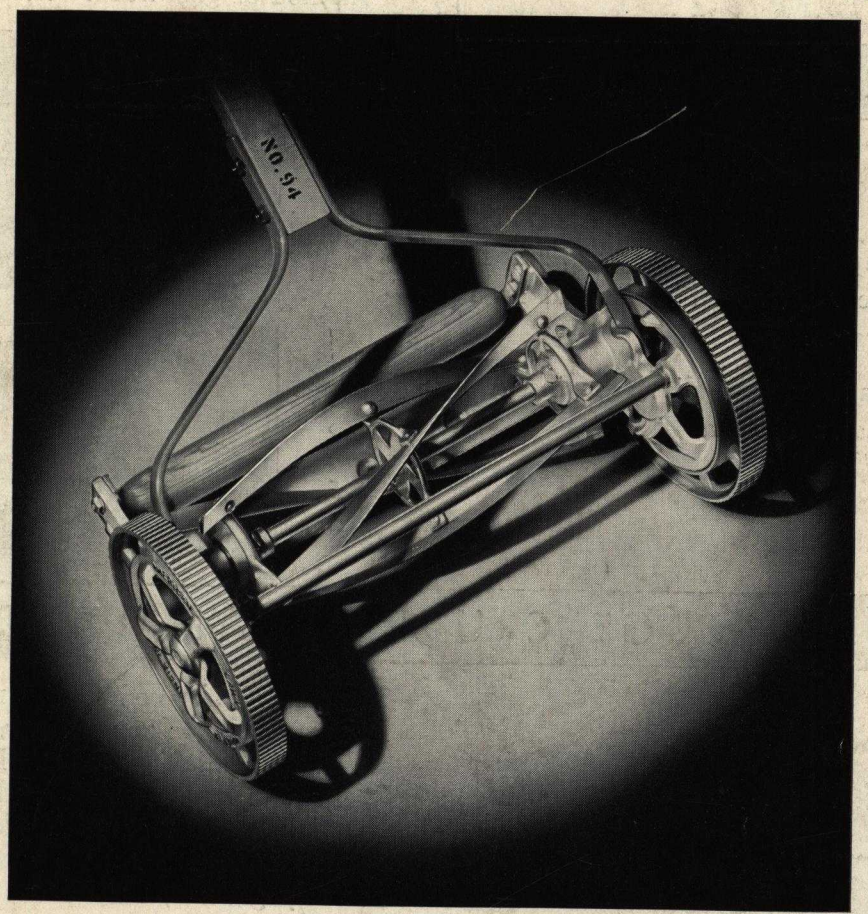

40 YEARS OF PRECISION MANUFACTURING BEHIND EVERY AMERICAN LAWN MOWER

AMERICAN LAWN MOWER COMPANY - - - MUNCIE, INDIANA

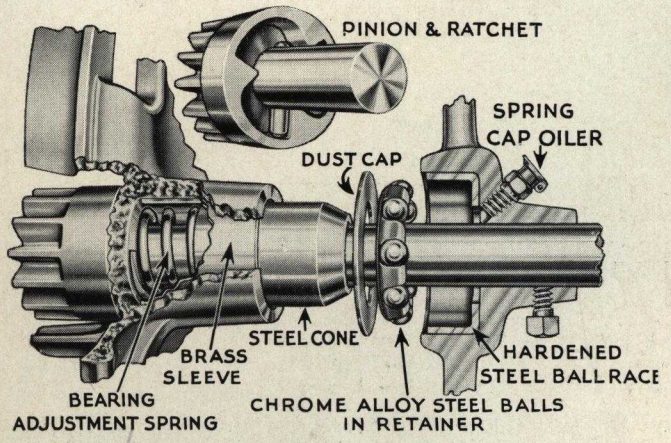

AUTOMATIC ADJUSTING BALL BEARINGS

All AMERICAN Ball Bearing Lawn Mowers have an exclusive Automatic Adjustment to take up wear in the bearings, which eliminates the necessity of any mechanical adjustment. This Automatic Adjustment keeps the Cutting Reel in perfect alignment at all times and represents one of the outstanding improvements in the construction of Ball Bearing Lawn Mowers in recent years. Conveniently placed Oil Cups provide an easy method of good lubrication.

CHROME ALLOY GRADE «A» STEEL BALLS

The Ball Bearing Assembly used in AMERICAN Lawn Mowers is made up of Precision-Ground, Hardened, $\frac{5}{16}$" Grade A Chrome Alloy Steel Balls held in a special retainer, as illustrated.

Perfect Bearings and positive alignment insure long life for AMERICAN Lawn Mowers.

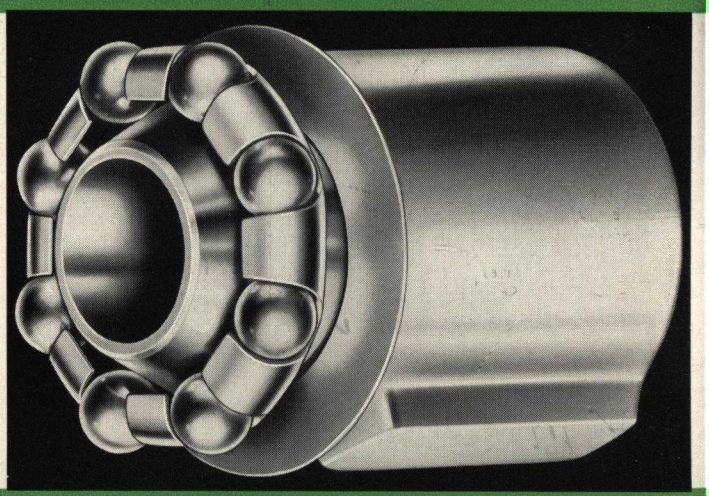

RAISED EDGE CRUCIBLE STEEL BED KNIFE

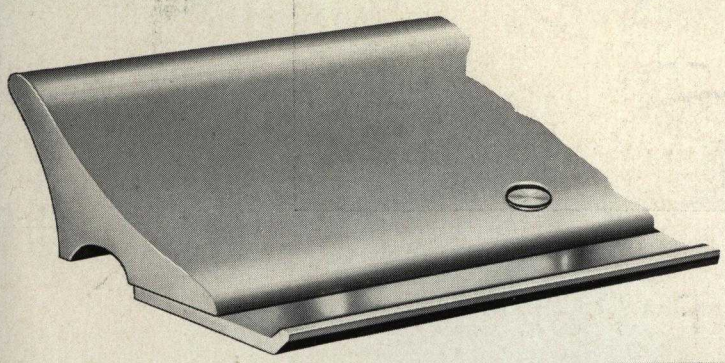

The Bed Knife used on AMERICAN QUALITY Lawn Mowers is made from a special alloy Crucible Tool Steel rolled with a Raised Edge. This raised, or lipped edge adds stiffness to the blade and relieves unnecessary friction in the contact with the Revolving Blades. The Lipped Edge Bed Knife is securely attached to an accurately ground, Semi-Steel Cast Cutter Bar.

The hardened Crucible Tool Steel Bed Knife used on AMERICAN Lawn Mowers insures a Cutting Blade that will stand up and give long and satisfactory service.

FOUR-SHOULDER LOCK FRAME

To keep the Cutting Units of a Lawn Mower in alignment, the body or chassis must be strong and rigid to withstand shock and vibration.

A feature in the construction of all AMERICAN Lawn Mowers is the Four-Shoulder Locked Frame shown in the illustration at the right.

The boss on either end of the Cutter Bar is milled to fit the machined recess in the Disk, and both ends of the Shrub Rod are machined and shouldered to fit into the Disk. The four joints are securely locked from the outside of each Disk, thus forming a frame that is both accurate and rigid.

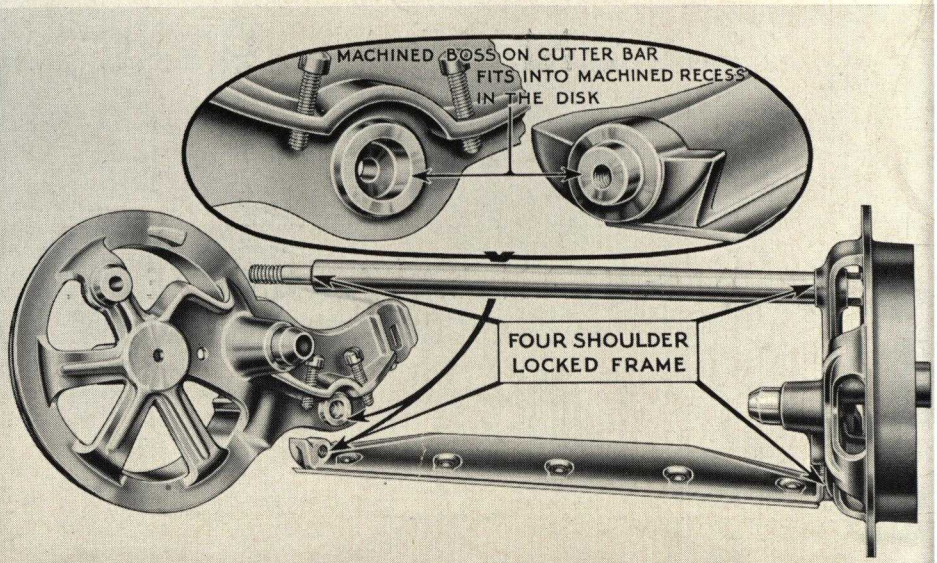

QUOTATIONS

AMERICAN LAWN MOWER CO.

MANUFACTURERS OF

HIGH GRADE LAWN MOWERS

TELEPHONE No. 209

MUNCIE, INDIANA

C. B. Scott
176 Main St.
Mt. Morris, N. Y.

July 15, 1935

— EXTREME WHOLESALE PRICES —

QUOTED SUBJECT TO CHANGE WITHOUT NOTICE

AMERICAN QUALITY LAWN MOWERS *"Perfect Cylinder" Cutting Unit*		12″	14″	16″	18″	20″
American Professional Ball Bearing with Roller Bearing Wheels	10″ Wheels, 5 Blades	x	x	$ 7.50	$ 8.25	$ 9.00
American Bent Grass Ball Bearing	10″ Wheels, 7 Blades	x	x	7.50	8.50	x
American Featherweight Ball Bearing *Aluminum alloy wheels and disks* Style 94	9″ Wheels, 4 Blades	x	7.15	7.40	x	x
American Unbreakable Ball Bearing	10″ Wheels, 5 Blades	x	x	6.00	6.50	x
American Rapid Ball Bearing with Roller Bearing Wheels	11″ Wheels, 5 Blades	x	x	7.90	8.65	9.40
American Congress Ball Bearing	10″ Wheels, 5 Blades	x	6.15	6.40	6.90	7.40
American Garland Ball Bearing	10″ Wheels, 4 Blades	x	5.10	5.35	5.85	6.35
American Speedy Ball Bearing	9″ Wheels, 4 Blades	3.75	4.00	4.25	4.75	x
CHALLENGE LINE OF LAWN MOWERS						
Wearwell Ball Bearings	10″ Wheels, 5 Blades	x	3.85	4.00	4.25	x
Challenge Ball Bearing	10″ Wheels, 4 Blades	x	3.60	3.75	4.00	x
Falcon Ball Bearing	9″ Wheels, 4 Blades	x	3.40	3.55	3.80	x
Rex Ball Bearing	8″ Wheels, 4 Blades	3.20	3.30	3.40	x	x
Silver Clipper Plain Bearing	8″ Wheels, 3 Blades	2.80	2.90	3.00	x	x

American Ball Bearing Lawn Trimmer
with Edger $3.75
without Edger $3.25

F. O. B. MUNCIE, INDIANA, with actual freight allowed up to 60c per cwt. on shipments of 6 or more machines.

Terms—2% April 10th or net May 1st, 1936. A discount of ½ of 1% per month will be allowed back to December 1st, 1935, for prepayment previous to April 1st, 1935. On shipments after April 1st terms are 2%, 10 days from date of invoice, or net 30 days.

All prices and terms are offered for immediate acceptance and are quoted subject to change without notice.

AMERICAN QUALITY LAWN MOWERS

American Lawn Mower Snap-On Rubber Tires

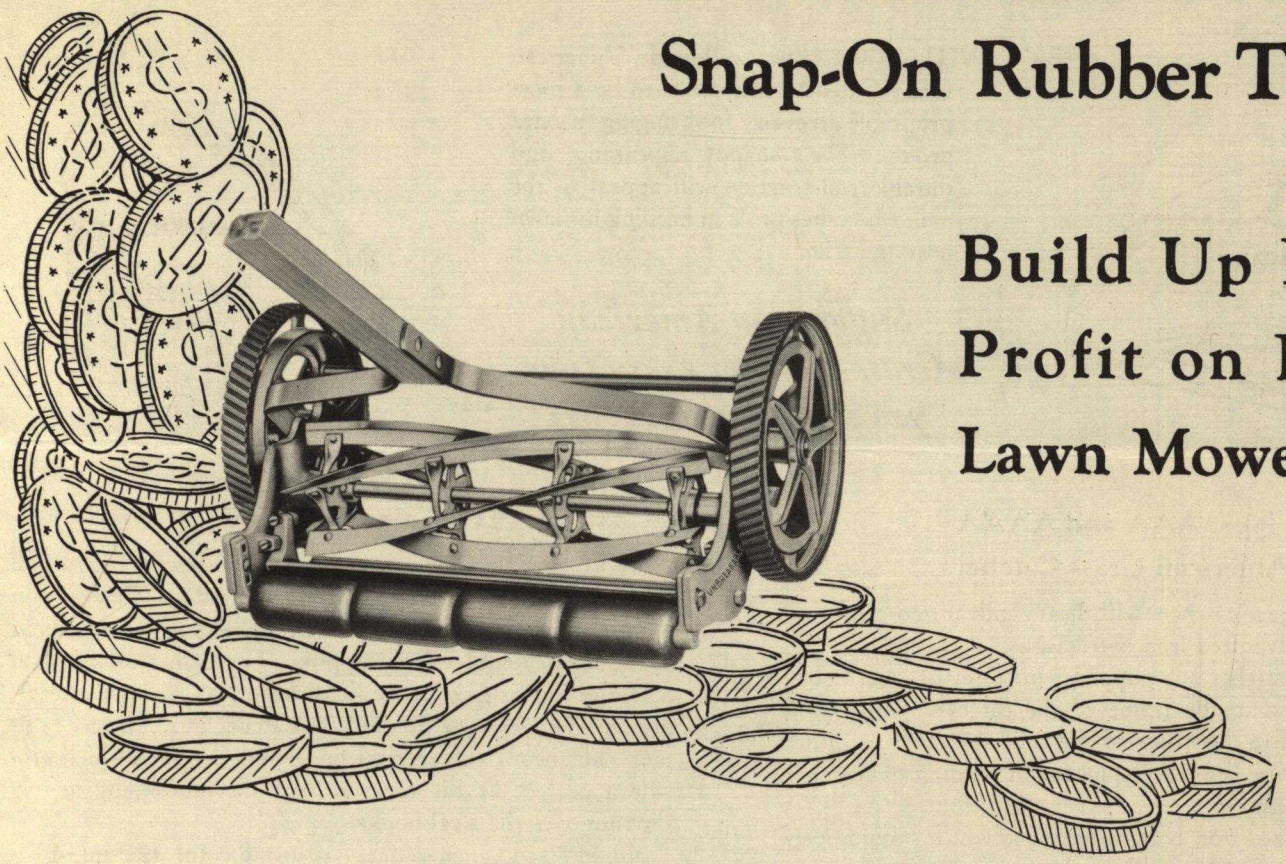

Build Up Extra Profit on Every Lawn Mower Sale

New Rubber-Snap-On-Tires—here is a new accessory for Lawn Mowers that will return you good profits on both new and old Lawn Mowers. Made from the same rubber used in automobile tires, American Snap-On-Rubber-Tires will fit any 10″ wheel mower with standard 1 1/8″ tread.

Sell your customer on the economy of these Snap-On-Tires. The live red rubber treads fully protect and shield wheels against breakage, which means longer life for the mower. American Snap-On-Rubber-Tires also act as a silencer, quieting the entire operation of the mower. Not only is the wheel and ground contact noise eliminated, but also the ratchet noise is greatly reduced.

The home owner who has bird baths or other statuary on his lawn will welcome the idea of equipping his Lawn Mower with American Snap-On-Rubber-Tires, as they will eliminate chipping and scarring. This feature alone should be an important figure in building up sales with cemeteries or other large users of Lawn Mowers.

Increase your profits on Lawn Mowers by selling American Snap-On-Rubber-Tires with every mower you sell. Sell them also to the man who bought a mower last year, or the year before. American Snap-On-Rubber-Tires will fit on any 10″ wheel mower with standard 1 1/8″ tread, no matter how old the mower. Made for 10″ wheels only.

It Pays to Sell American Lawn Accessories . . . an Added Margin of Profit

AMERICAN QUALITY LAWN MOWERS

AMERICAN GRASS CATCHERS

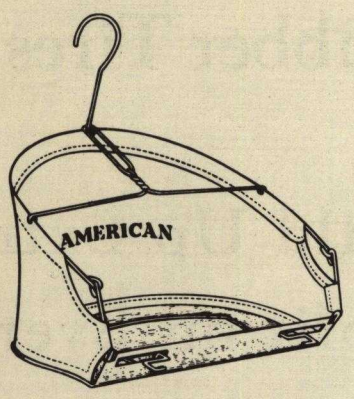

These attractive, well-made, American Grass Catchers will prove to be a most profitable accessory for bringing in extra profits. Their snappy appearance and durable construction will appeal to the man who takes pride in keeping his lawn neat and trim.

Suggest an American Grass Catcher every time you sell a Lawn Mower

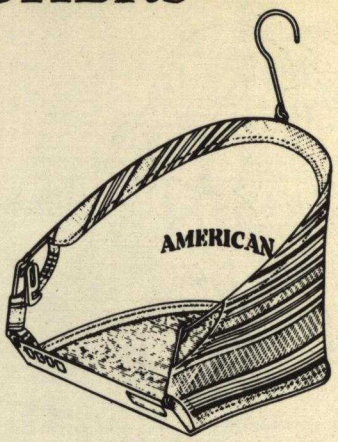

Nos. AAA and AAAA American Grass Catchers

Round back grass catchers with heavy galvanized steel wire frames and galvanized iron bottoms.

Each grass catcher is equipped with a set of steel hooks which are wired to the frame of the catcher. These steel hooks attached to the inside of the roller brackets on either side of the mower provide the means of holding the catcher in its proper position.

The galvanized iron bottom has slots which provide perfect adjustment for the width of the mower by slipping over the steel hooks. The AAA and AAAA grass catchers are fitted with special stationary handles so attached that the entire handle is within the catcher. The galvanized iron frame and handle fold flat against the bottom for convenience in shipping.

No. AAA—13 inches deep, adjustable for 12″ to 16″ mowers. Weight per dozen, 35 pounds. White Duck. To retail @ 89c.

No. AAAA—13 inches deep, adjustable for 16″ to 20″ mowers. Weight per dozen, 40 pounds. White Duck. To retail @ $1.00.

No. A American Grass Catcher

(For illustration see above—same except for handle and cross-brace construction)

A durable, high grade grass catcher with coil spring, self-adjusting hooks which regulate the tension and holds catcher firmly in place on the mower.

Made with rounded back frame and extra heavy galvanized iron bottom. Best grade heavy galvanized wire is used in the construction of the frame.

The wire frame folds flat against the bottom for convenience in shipping.

No. A—13 inches deep, adjustable for 12″ to 16″ mowers. Weight per dozen, 38 pounds. White Duck. To retail @ 89c.

No. HW American Grass Catcher

A well made, popular priced grass catcher with heavy galvanized steel wire, round back frame and galvanized iron bottom. Equipped with pair of steel hooks which are wired to frame of catcher before shipping. These steel hooks, when bolted to the inside of the roller brackets of the lawn mower, provide the means of holding the catcher in its proper position. The heavy galvanized iron bottom has slots which provide a perfect fit for the width of the mower, by merely slipping over the steel hooks.

No. HW—13 inches deep, adjustable for 12″ to 16″ mowers. Weight per dozen, 32 pounds. White Duck. To retail @ 69c.

No. HC American Grass Catcher

No. HC—Same as the No. HW Grass Catcher in style and construction except that the No. HC has an extra heavy painted striped canvas. This painted striped canvas attracts attention and will sell both mowers and grass catchers. It is a real merchandiser.

No. HC—13 inches deep, adjustable for 12″ to 16″ mowers. Weight per dozen, 36 pounds. Painted Canvas. To retail @ 79c.

No. X "Adjustable Grass Catcher with White Drill Bottom"

(Not Illustrated)

A practical, low priced grass catcher with adjustable wire frame made with loops which slip over steel hooks.

The steel hooks which are supplied with each catcher are bolted to the inside of the roller brackets on either side of the mower, and provide the means of holding catcher in its proper place.

The frame is made from best grade galvanized steel wire.

No. X—9 inches deep, with white drill bottom, and one reinforcing brace. Adjustable for 12″ to 16″ mowers. Weight per dozen, 15 pounds. To retail @ 65c. Made for 10″ wheels only.

Please note the No. X is supplied on special orders only.

It Pays to Sell American Lawn Accessories . . . an Added Margin of Profit

AMERICAN POWER MOWER

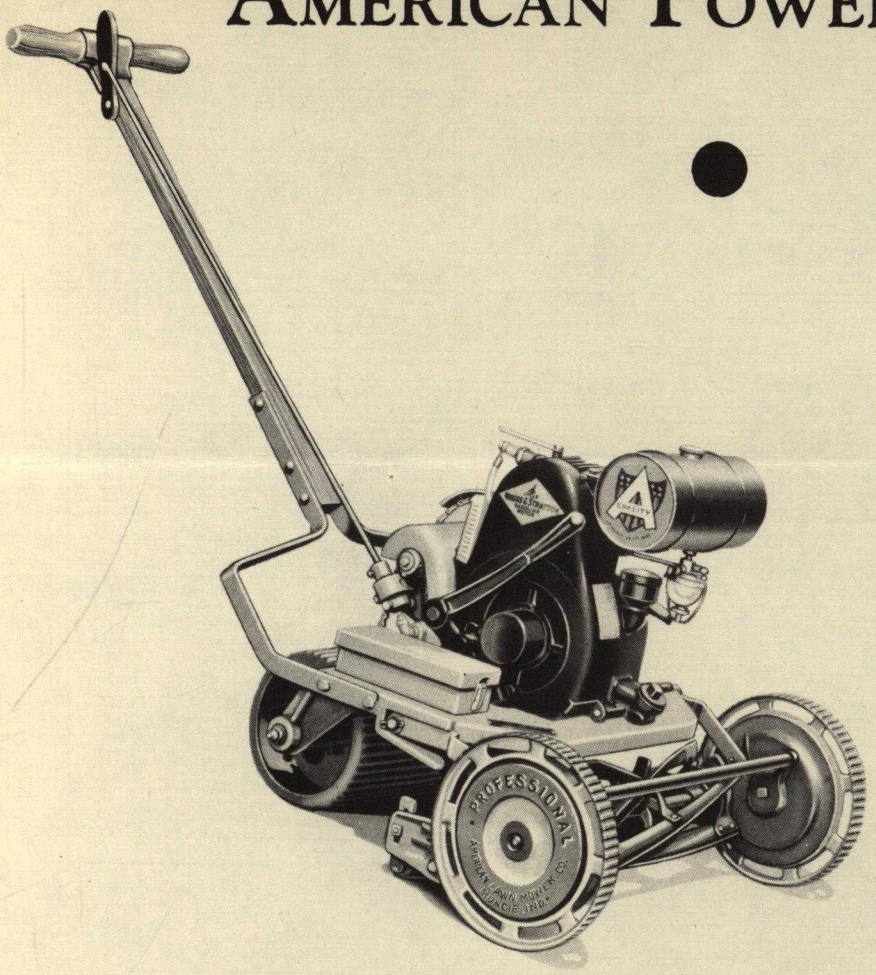

Specifications:

POWER—Single cylinder, 4-cycle, air-cooled Briggs & Stratton engine.
IGNITION—High tension, moisture-proof fly wheel magneto, easy starting under all conditions.
CARBURETOR—Tillotson float feed carburetor with air cleaner and choke.
LUBRICATION — Engine: Plunger pump and splash system, giving positive lubrication to all motor parts. Cutting Unit: Oil cups or openings provided wherever lubrication is required. Chassis: Clutch and drive rollers, Alemite pressure system lubrication.
STARTER—Hand crank with safety ratchet.
FUEL TANK—5-pint capacity.
CLUTCH—Twin disc.
DRIVE ROLLERS—Two cast iron corrugated tread, 8" in diameter, with differential to prevent scalping.
CUTTING UNIT—The 18" or 20" cut American Professional Ball Bearing unit with 5-blade cutting reel is standard equipment. Other mower units, such as the American Bent Grass Ball Bearing, which has a 7-blade cutting reel, can be supplied at a slight additional cost.
SPEED RANGE—1700 to 1900 RPM, engine develops 1/2 horsepower at 1700 RPM.
SHIPPING WEIGHT — 265 pounds complete. Net weight, 220 pounds.

THE AMERICAN POWER LAWN MOWER is particularly suited for use around homes, schools, hospitals, etc., having lawns that are not large enough to warrant the purchase of expensive power cutting equipment, yet are really too large to be conveniently mowed by hand.

Both the power unit and the cutting unit are sturdily constructed along the simplest lines possible, yet both are light in weight and so easy to handle that a fifteen-year-old boy can easily operate the mower.

The power for operating the mower is provided by a reliable 4-cycle Briggs and Stratton air-cooled engine, which is mounted above the drive rollers. Power is applied to the rollers through a Twin-Disc Clutch by a Chain Drive. The cutting unit is attached to the power frame with special handle irons having sufficient play to compensate for bumps and any rough places which may be in the lawn. This cutting unit is easily detached by removing two cotter keys from the handle iron hubs.

The American Power Mower will be found to be a very convenient and satisfactory around flower beds and shrubbery, as it requires but little effort to back it up or to go in and out of tight corners. The engine is balanced slightly ahead of the rollers so that the cutting unit is held to the ground, yet by just a little pressure downward on the handle the cutting unit may be lifted to pass over walks and drives without damage.

The standard cutting unit for this machine is the American Professional Ball Bearing Lawn Mower, which has heavy duty roller bearings in the hubs of the wheels and other features, making it particularly adaptable for power operation. This machine has a 5-blade reel and will be found suitable for nearly all requirements. However, where customers have bent grass lawns or some special type of turf, a lawn mower such as the American Bent Grass or similar cutting unit may be found to be better suited to the requirements of the individual case and can be supplied in place of the American Professional Ball Bearing unit.

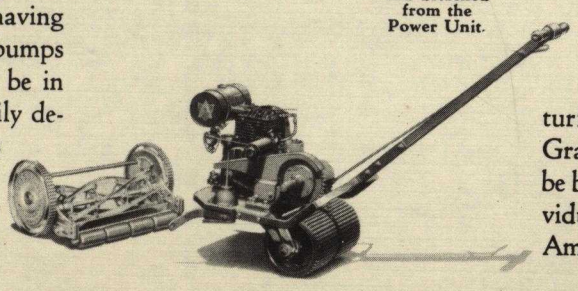

Photo shows how the cutting unit is easily attached and detached from the Power Unit.

AMERICAN QUALITY LAWN MOWERS

American Professional

10" ROLLER BEARING WHEELS — 5 BLADES

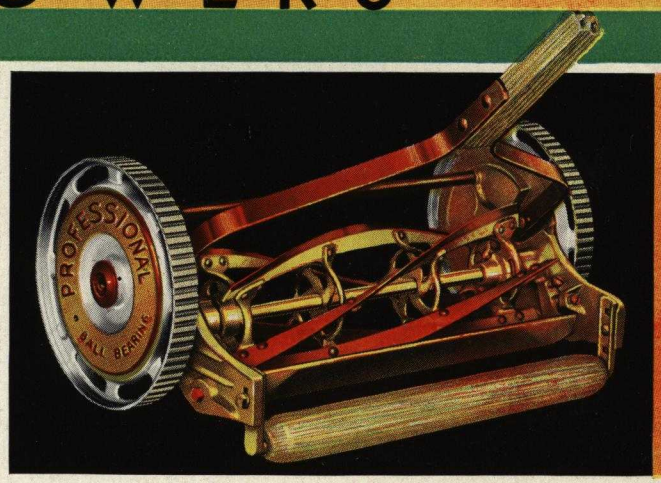

An outstanding quality Lawn Mower designed for professional grass cutters, cemeteries, parks, golf courses, and large estates.

Built with Perfect Cylinder Cutting Reel 6" in diameter . . . 5 Crucible Steel Blades . . . Self Sharpening . . . Spring Cap Oilers . . . Raised-Edge Tool Steel Bed Knife securely fastened to accurately ground Semi-Steel Cutter Bar . . . Automatic Adjusting Bearings with $\frac{5}{16}$" Grade A Chrome Steel Balls . . . Positive Acting Pinions with Deep Shoulder . . . Four-Shoulder Locked Frame Body . . . Roller Bearing Drive Wheels.

Sizes	16-inch	18-inch	20-inch
Shipping Wt.	50 lbs.	52 lbs.	54 lbs.

• • •

American Bent Grass

10" WHEELS — BALL BEARING — 7 BLADES

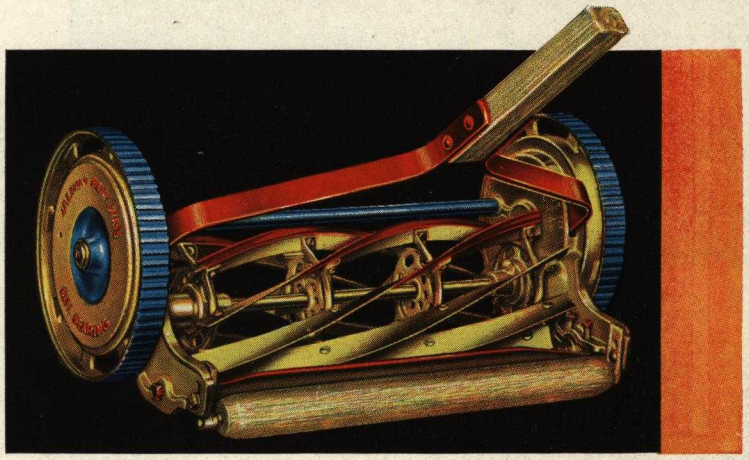

A High Grade Lawn Mower with seven revolving blades designed for cutting creeping bent lawns. Will cut within ¼" of the ground. Not recommended for blue grass lawns.

Extra heavy Cutting Reel 6" in diameter with seven Crucible Steel Blades . . . Spring Cap Oilers . . . Crucible Tool Steel Bed Knife attached to accurately ground Semi-Steel Cutter Bar . . . Automatic Adjusting Bearings with Grade A Chrome Steel Balls . . . Positive Acting Pinions . . . Four-Shoulder Locked Frame Body.

Sizes	16-inch	18-inch
Shipping Wt.	49 lbs.	51 lbs.

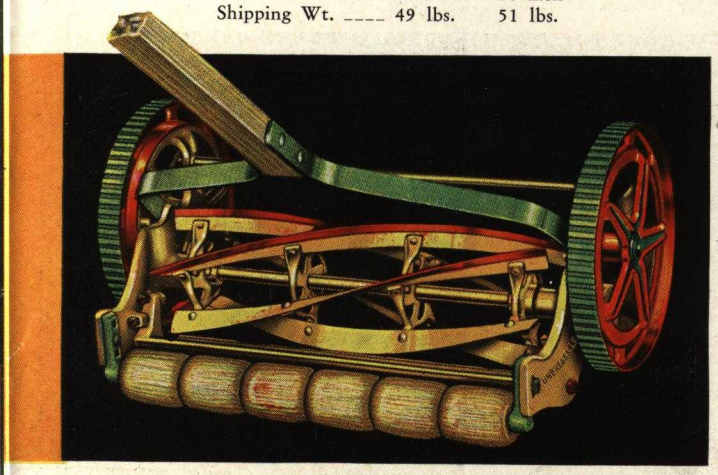

Shown American Unbreakable

10" WHEELS — BALL BEARING — 5 BLADES

A full Unbreakable Lawn Mower with specially designed sectional roller. Sturdy, light in weight, and easy running. A Mower with many unusual features that can be retailed at an attractive price.

Five Crucible Steel Blade Reel with 4 Malleable Spiders mounted on $\frac{5}{8}$" Steel Shaft . . . Spring Cap Oilers . . . Raised-Edge Crucible Tool Steel Bed Knife . . . Automatic Adjusting Bearings . . . Chrome Steel Balls . . . Positive Pinions . . . Four-Shoulder Locked Frame Body . . . Special Sectional Roller.

Sizes	16-inch	18-inch	20-inch
Shipping Wt.	44 lbs.	46 lbs.	48 lbs.

AMERICAN QUALITY LAWN MOWERS

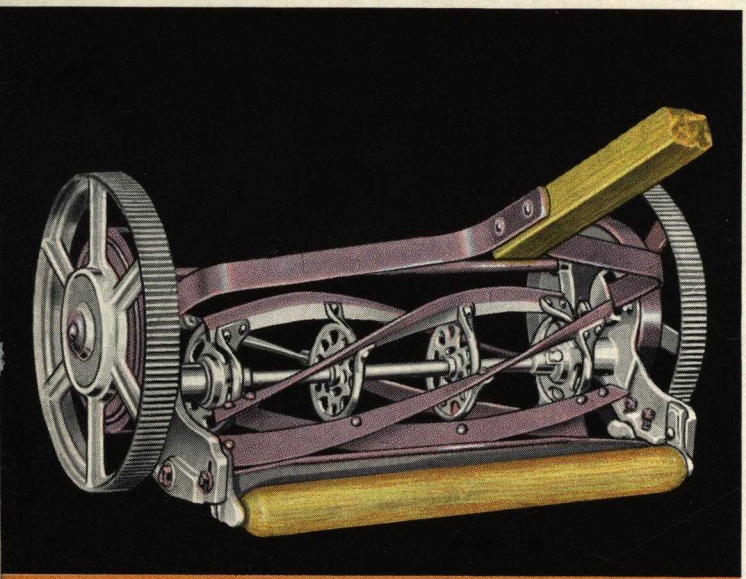

American Featherweight

Style M-105

10" WHEELS — BALL BEARING — 5 BLADES

A High Wheel Lawn Mower with featherweight wheels and side plates made from special tough aluminum alloy, having all the rugged advantages of heavy cast iron mowers. Easy to operate and built for long, hard service.

Perfect Cylinder Cutting Reel 6" in diameter with 5 Special High Carbon Crucible Steel Blades . . . Self Sharpening . . . Spring Cap Oilers . . . Raised-Edge Crucible Tool Steel Bed Knife . . . Automatic Adjusting Bearings with Grade A Chrome Steel Balls . . . Four-Shoulder Locked Frame . . . Triple Pawl Ratchet with Wearproof Pinions.

Sizes	16-inch	18-inch
Shipping Wt.	38 lbs.	40 lbs.

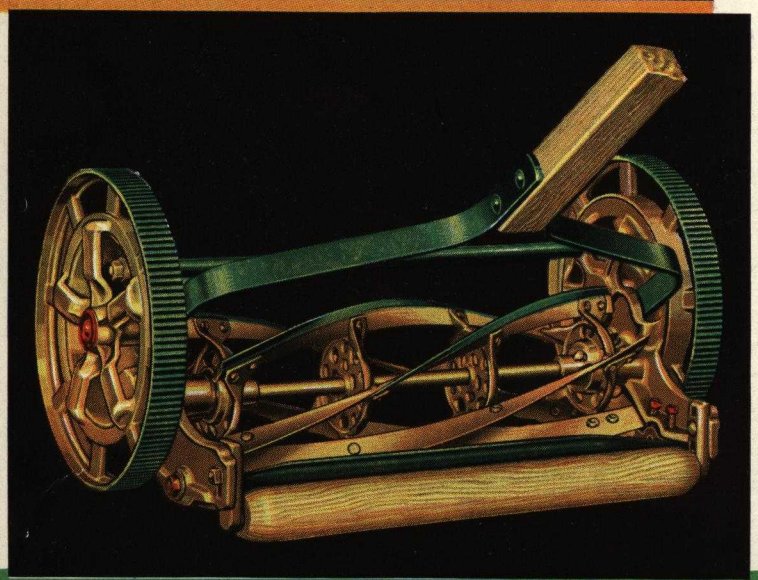

American Rapid

11" WHEELS — BALL BEARING — 5 BLADES

A Heavy-Duty Quality Lawn Mower with 11-inch drive wheels. Precision built and designed for easy operation in the cutting of large plots of grass.

Cutting Reel 6" in diameter with five Self-Sharpening Crucible Steel Blades mounted on extra heavy Double-Riveted Malleable Spiders . . . Perfect Cylinder Cutting Unit . . . Spring Cap Oilers . . . Raised-Edge Crucible Tool Steel Bed Knife attached to accurately ground Semi-Steel Cutter Bar . . . Automatic Adjusting Bearings with $\frac{5}{16}$" Grade A Chrome Steel Balls . . . Positive Acting, Deep-Shouldered Pinions.

Sizes	16-inch	18-inch	20-inch
Shipping Wt.	50 lbs.	52 lbs.	54 lbs.

Featuring the «PERFECT CYLINDER» Cutting Unit Which Insures Frictionless Operation

American Congress

10" WHEELS — BALL BEARING — 5 BLADES

A popular selling, Quality Lawn Mower having lasting qualities and ease of operation. Designed for the customer who is "looking for something better."

Rigid Four-Shoulder Locked Frame . . . Perfect Cylinder Cutting Reel 6" in diameter, with Five Crucible Steel Blades mounted on double-riveted Malleable Spiders . . . Spring Cap Oilers . . . Raised-Edge Crucible Steel Bed Knife attached to an accurately ground Semi-Steel Cutter Bar . . . Automatic Adjusting Bearings . . . $\frac{5}{16}$" Grade A Chrome Steel Balls . . . Positive, Deep-Catch Pinions.

Sizes	14-inch	16-inch	18-inch	20-inch
Shipping Wt.	46½ lbs.	48 lbs.	50 lbs.	52 lbs.

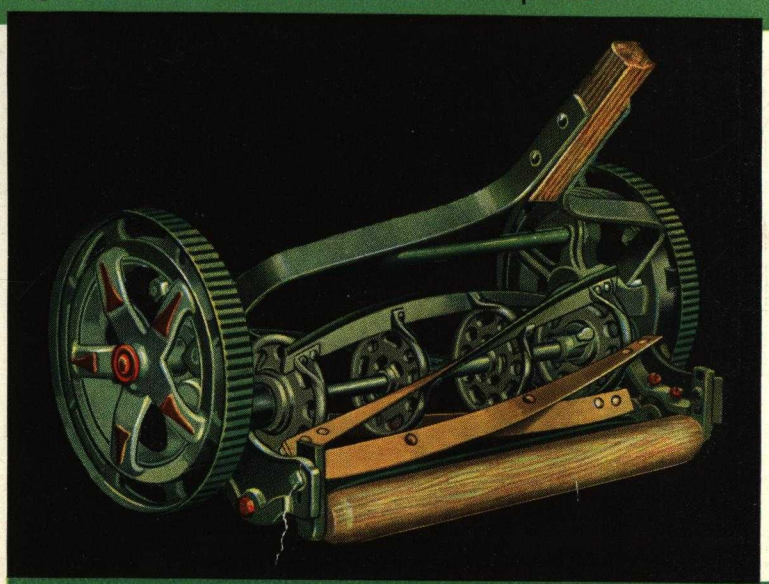

A STYLE FOR EVERY NEED

AMERICAN QUALITY LAWN MOWERS

American Featherweight

Style 94

9" WHEELS — BALL BEARING — 4 BLADES

A Light, Durable Lawn Mower with aluminum alloy disks and wheels. Designed for cutting terraces and embankments of golf courses. Ideal for women and children.

Perfect Cylinder Cutting Reel 6" in diameter with Four Self-Sharpening Crucible Steel Blades . . . Spring Cap Oilers . . . Raised-Edge Crucible Tool Steel Bed Knife . . . Automatic Adjusting Bearings with $\frac{5}{16}$" Chrome Steel Balls. Positive-Acting Pinions with deep catch . . . Special Steel Sleeve on axle and Brass Sleeve in hub eliminates play and wear in wheels . . . Actual weight, 16" size, 27 lbs. (not boxed).

Size	16-inch
Shipping Wt.	34 lbs.

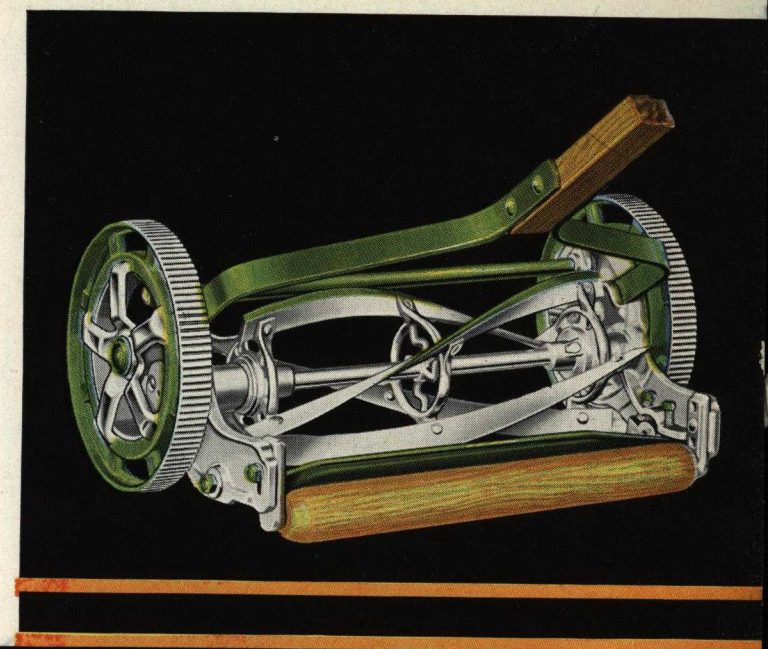

• • •

American Garland

10" WHEELS — BALL BEARING — 4 BLADES

A Lawn Mower that has been sold throughout the world for years. Recognized for its durability and ease of operation. Built for the man who takes pride in his lawn.

Four-Blade Self-Sharpening Perfect Cylinder Cutting Unit, 6" in diameter, mounted on Heavy Malleables . . . Spring Cap Oilers . . . Raised-Edge Crucible Tool Steel Bed Knife attached to accurately ground Semi-Steel Cutter Bar . . . Four-Shoulder Lock Frame . . . Positive Pinions . . . Automatic Adjusting Bearings with $\frac{5}{16}$" Chrome Alloy Steel Balls.

Sizes	14-inch	16-inch	18-inch	20-inch
Shipping Wt.	45 lbs.	47 lbs.	49 lbs.	51 lbs.

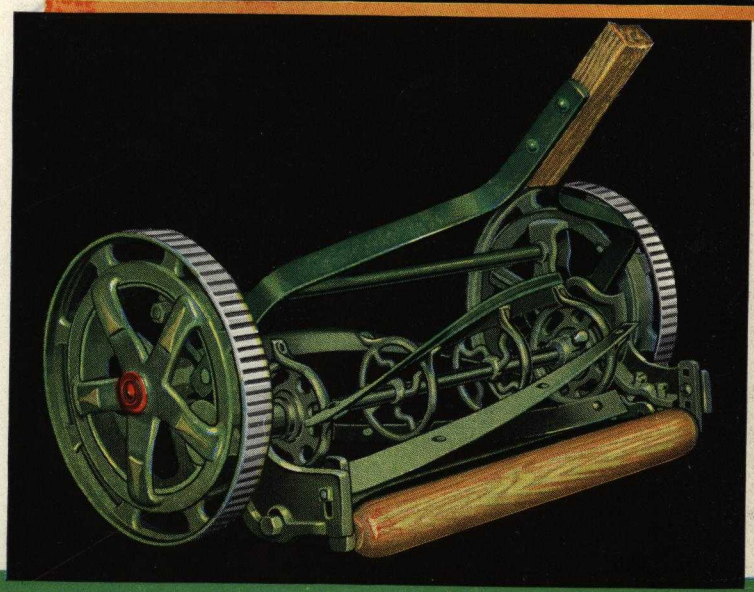

Featuring the «PERFECT CYLINDER» Cutting Unit Which Insures Frictionless Operation

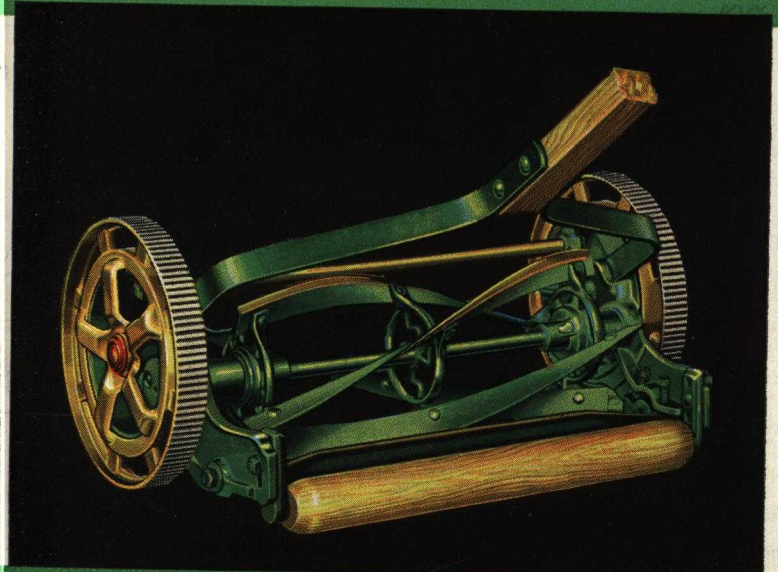

A STYLE FOR EVERY NEED

American Speedy

9" WHEELS — BALL BEARING — 4 BLADES

A Moderate-Priced, Quality Lawn Mower designed for general use. Especially adapted for cemeteries and for the cutting of terraces.

Four-Shoulder Locked Frame . . . Perfect Cylinder Cutting Reel 6" in diameter with Four Self-Sharpening Crucible Steel Blades . . . Spring Cap Oilers . . . Raised-Edge Tool Steel Bed Knife attached to specially ground Semi-Steel Cutter Bar . . . Automatic Adjusting Bearings . . . $\frac{5}{16}$"Chrome Alloy Steel Balls . . . Positive Acting Pinions.

Sizes	14-inch	16-inch	18-inch
Shipping Wt.	39 lbs.	41 lbs.	42½ lbs.

CHALLENGE Line of Lawn Mowers

High Grade, Easy Running Lawn Mowers of dependable quality, representing outstanding values at attractive prices. Accurately made, and built to give long and satisfactory service.

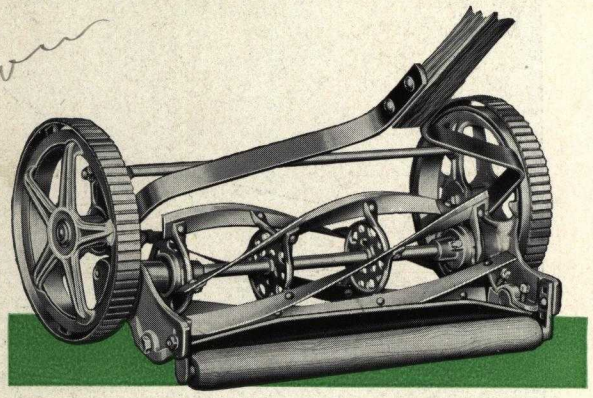

WEARWELL BALL BEARING LAWN MOWER

10″ DRIVE WHEELS — 5 BLADES

Cutting Reel 6 in. in diameter . . . Five Self-Sharpening Crucible Steel Blades . . . Bed Knife, Hardened, Raised-Edge Tool Steel Blade . . . Bearings, Automatic Adjusting with $\frac{5}{16}$″ Chrome Alloy Steel Balls . . . Spring Cap Oilers . . . Body, Four-Shoulder Locked Frame . . . Pinions, Positive Acting . . . Finish, Gold and Aluminum Bronze, trimmed in Red and Blue Enamel.

Sizes	14-inch	16-inch	18-inch
Shipping Wt.	41 lbs.	43 lbs.	45 lbs.

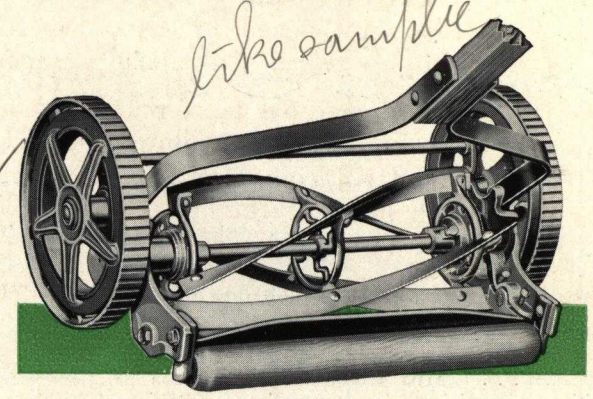

CHALLENGE BALL BEARING LAWN MOWER

10″ DRIVE WHEELS — 4 BLADES

Cutting Reel 6″ in diameter . . . Four Self-Sharpening Crucible Steel Blades . . . Bed Knife, Hardened, Raised-Edge Tool Steel Blade . . . Bearings, Automatic Adjusting with $\frac{5}{16}$″ Chrome Alloy Steel Balls . . . Spring Cap Oilers . . . Body, Four-Shoulder Locked Frame . . . Pinions, Positive Acting . . . Finish, Gold Bronze trimmed with Red and Green Enamel.

Sizes	14-inch	16-inch	18-inch
Shipping Wt.	40½ lbs.	42½ lbs.	44½ lbs.

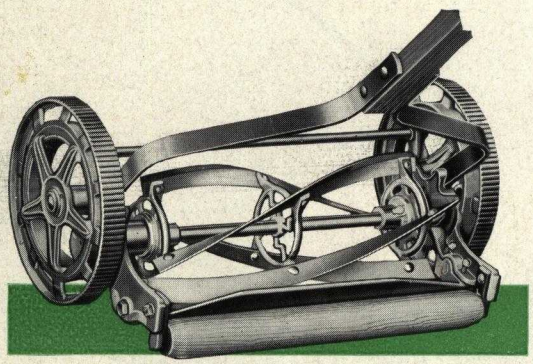

FALCON BALL BEARING LAWN MOWER

9″ DRIVE WHEELS — 4 BLADES

Cutting Reel 6″ in diameter . . . Four Self-Sharpening Crucible Steel Blades . . . Bed Knife, Hardened, Raised-Edge Tool Steel Blade . . . Bearings, Automatic Adjusting with $\frac{5}{16}$″ Chrome Alloy Steel Balls . . . Spring Cap Oilers . . . Body, Four-Shoulder Locked Frame . . . Pinions, Positive Acting . . . Finish, Gold Bronze trimmed in Green Enamel.

Sizes	14-inch	16-inch	18-inch
Shipping Wt.	35½ lbs.	37 lbs.	38½ lbs.

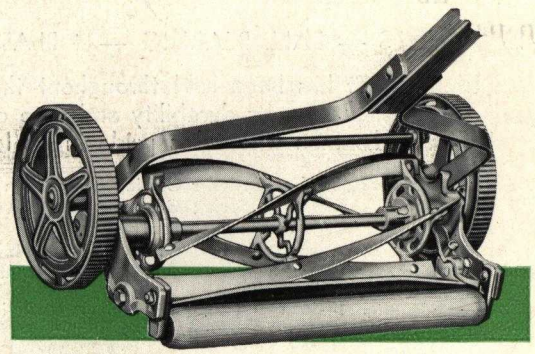

REX BALL BEARING LAWN MOWER

8″ DRIVE WHEELS — 4 BLADES

Body, Four-Shoulder Locked Frame . . . Bearings, Automatic Adjusting with $\frac{5}{16}$″ Steel Balls . . . Spring Cap Oilers . . . Cutting Reel 6″ in diameter . . . Four Crucible Steel Blades . . . Bed Knife, Raised-Edge Tool Steel Blade . . . Pinions, Positive Acting . . . Finish, Jade Green Enamel trimmed in Gold and Red.

Sizes	12-inch	14-inch	16-inch
Shipping Wt.	33 lbs.	34½ lbs.	36 lbs.

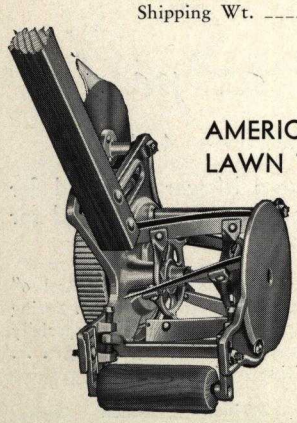

AMERICAN BALL BEARING LAWN TRIMMER and EDGER

Drive Wheels 8″ with 1¼″ Tread . . . Cutting Reel, Five Crucible Steel Blades. . . . Bearings, Automatic Adjusting . . . Bed Knife, Tool Steel . . . Edging Disc, Hardened Tool Steel with Steel Plow. Finish, Gold Bronze trimmed in Red.

Can be furnished with or without Edger.

Shipping Weight — 24 lbs.

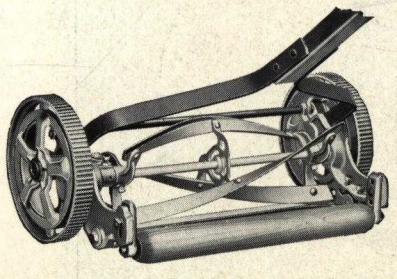

SILVER CLIPPER MOWER

8″ DRIVE WHEELS — 3 BLADES

A well-made Plain-Bearing Lawn Mower with 8″ Drive Wheels and Three Cutting Blades, with Adjustable Brass Bushings and Positive Pinions . . . Finished in Aluminum Bronze and trimmed in Red Enamel.

Sizes and Shipping Wt. —

12-inch	14-inch	16-inch
30 lbs.	31½ lbs.	33½ lbs.

ACTUAL PHOTO OF PAPER TEST

During the process of manufacturing, every part entering into the construction of AMERICAN Lawn Mowers is thoroughly tested and carefully inspected.

After the Lawn Mower has been rolled out under actual operating conditions, as illustrated and described below, and before a Mower is packed, it is given a thorough final inspection and each blade is paper tested.

In the Paper Test, every blade must shear a piece of paper the entire width of the Bed Knife.

This exacting and final inspection is our customer's assurance that AMERICAN Lawn Mowers will reach him in perfect condition.

ROLLING OUT

Before a Lawn Mower is given its final inspection and paper test, it is thoroughly oiled and then run over a special Testing Roller. This permits the inspection of the machine under actual running conditions.

The rolling out and careful inspection given to each Mower is only one of the many reasons why AMERICAN Lawn Mowers are recognized for their smooth-cutting qualities and ease of operation.

PACKED FOR SHIPMENT

AMERICAN Lawn Mowers are carefully packed in special, reinforced Mullen-tested cartons that insure safe delivery of the mower in perfect condition.

Our stocks are adequate at all times, assuring prompt attention and immediate delivery on all orders.

It's Easy with an American

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:
Mike Jackson, FAIA